


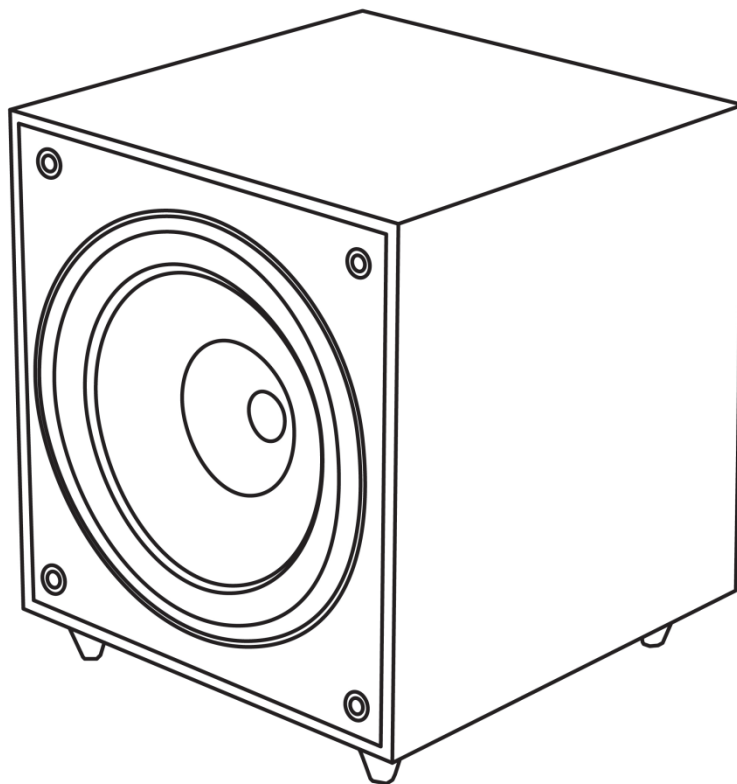

SW-C600W

User Manual

TABLE OF CONTENTS

Introduction

Important Safety Notice

Caution

Unpacking Instruction

Accessories Package

Precaution and Suggestion

Back Panel Overview

Subwoofer Connection

Subwoofer Placement

Setting Your Subwoofer

Receiver Set Up

Specification

Design and Feature

Warranty

Introduction

Dear Valued Customer,

Thank you for your purchase of SensaSound SW-C600W subwoofer, before you unpack and install the products we suggest that you read through this owner's manual and save it for future reference. This manual can help you complete the right product connection and placement which will optimize the subwoofer's performance successfully. Should you still have any further questions about the product, please contact your local dealer or directly write us an email about your inquiry. Welcome to our SensaSound family, it is time to enjoy your sensational sound.

SENSASOUND TEAM

Important Safety Notice

Read and follow these instructions:

1. Do not use this apparatus near water or in any wet environment.
2. Clean the apparatus only with a dry cloth.
3. Keep the apparatus away from any sources that produce heat.
4. The apparatus should be properly installed so that its location or position does not block any ventilation openings. Also, it should not be placed in a built-in installation, such as a bookcase or cabinet which may impede the air flow.
5. Power cords should be protected so that they are not likely to be walked on or pinched especially near the plugs, convenience receptacles, and the point where they exit from the apparatus.
6. Do not defeat the safety purpose of the polarized or grounding-type plug.
7. Only use attachments that are specified by the manufacturer.
8. In order to prevent the damage to the product during lightning or power-line surges, unplug the apparatus from wall outlet.
9. Use the appropriate shipping tools when moving the apparatus to avoid the injury from tip-over and fall-off.
10. Do not overload wall outlet and extension cords in order to avoid the risk of fire or electric shock.
11. Ask for service assistance from qualified personnel when apparatus has been damaged, such as damage to the supply cord or plug, liquid spillage into the apparatus, damage to the apparatus from fallen objects, significant change in performance, malfunctions or water exposure etc.
12. Unplug the power cord from apparatus when unused for a period of time.
13. The objects which are filled with water, such as vases, should not be placed on the apparatus.
14. Do not place the apparatus on unstable stand, shelf, bracket or table. This may cause a serious injury and product damage. Please follow all instructions in this manual.

Caution



This symbol warns the presence of dangerous voltage inside the enclosure. There is a high risk of electric shock if the product is opened at which the symbol appears. Please follow all instructions specified in this manual.

Unpacking Instruction

1. Before unpacking the box, check the integrity of the package and ensure that there is no visual signs of damage. Otherwise you should consult your SensaSound dealer before you start the installation.
2. When unpacking the box, handle with care in order to avoid any damage to the product.
3. Keep the original carton for future shipping.

Accessories Package

SW-C600W

AC Power Cord	1
Glove & Manual Book	1

TX-C600


Adapter	1
Transmitter	1

Precaution and Suggestion

Important: Turn off all equipments before you making any connection.

1. Normally subwoofer unit is heavy weight, it is important that you properly handle the unit unpacking, movement and placement, this will help to avoid unnecessary damage to the unit, operator and floors.
2. Properly connect the system for achieving the best performance. Failing to do so may cause noise or damage to your equipments. If possible, choose the highest quality cable within your budget. You need thicker cable for longer runs.
3. SW-C600W is capable of delivering a high-level output to support the bass from your audio system. We recommend to adjust the sound pressure at a comfortable listening volume.

Back Panel Overview

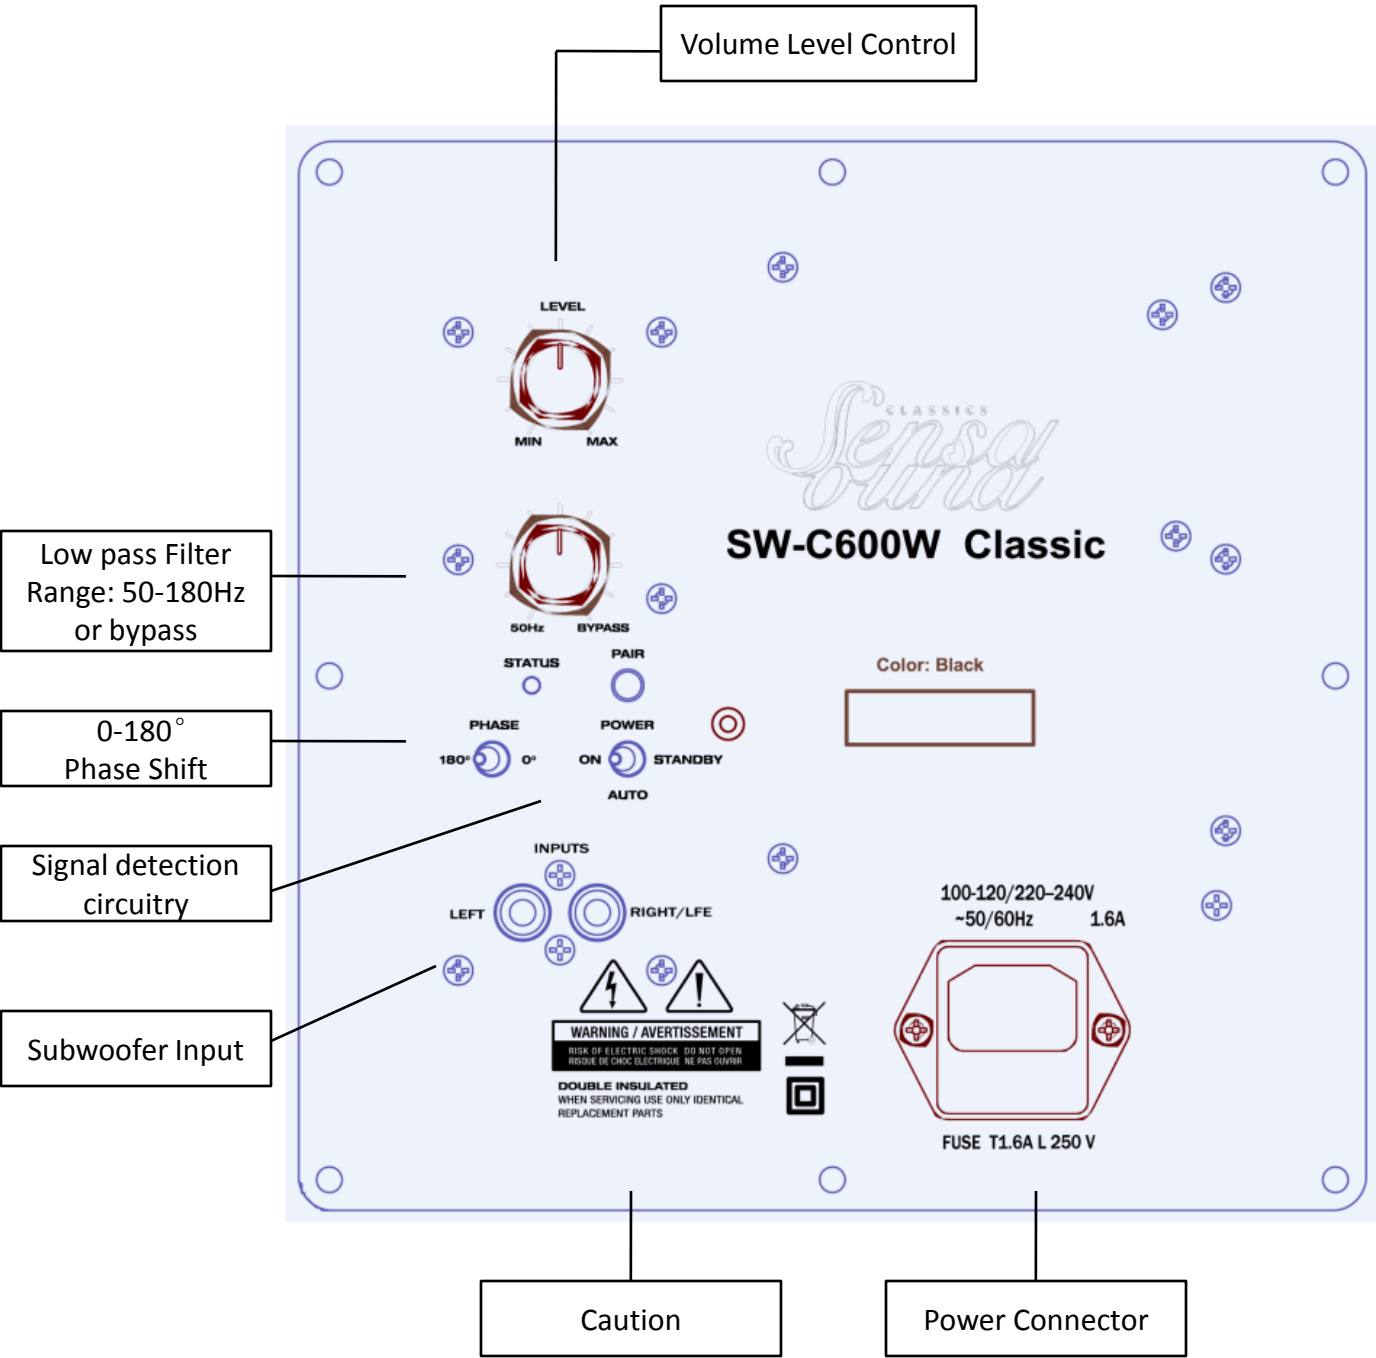


Subwoofer Connection

1. Before you do the connection, make sure that you have prepared a dedicated subwoofer cable to support your bass system.
2. Found the place of “subwoofer output” at the rear of your receiver and the place of “SUB IN” at your subwoofer amplifier board, insert the subwoofer cable from the receiver’s “subwoofer output” to subwoofer’s “SUB IN”.
3. We recommend to use a “shielded subwoofer cable” to avoid annoying signal into your bass performance.
4. Found the place of “Power Connector” at your subwoofer amplifier board. Plug the AC power cord into the back of your subwoofer and then into a wall outlet or power strip. DO NOT plug it into the back of your receiver or preamp.
5. SW-C600W is sold with a wireless receiver. If you want to use wireless function, insert the TX-C600 transmitter into the receiver’s “subwoofer output” instead of subwoofer cables.


Subwoofer Placement

Properly place the subwoofer will improve the bass performance greatly and deliver even sound pressure level throughout your listening area. Here are a few guidelines to help finding the optimal location.

1. If you use one SW-C600W subwoofer, you can place it within one foot of the corner to get a greatest output level.
2. If you use a pair of SW-C600W subwoofers, measure the width between two sides of your room, place them at $1/3$ and $2/3$ of the room.
3. Different from 5.0 system, the placement rule of subwoofer is much flexible than 5.0 system since it is a non directional sound unit. Use the golden rule to perform a few experiments to find a best location in the room until your ears are satisfied with the results.

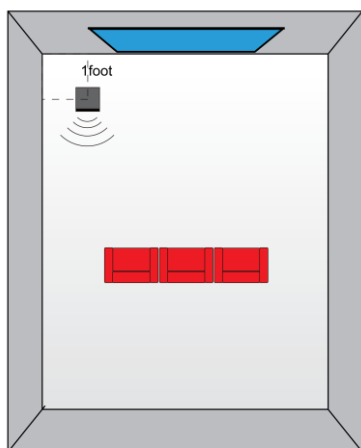

One Subwoofer Placement

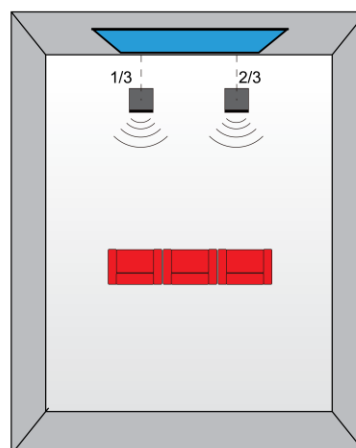

A pair of Subwoofer Placement


Setting your Subwoofer

Recommend Initial Settings

From top to bottom, there are four knobs at subwoofer amplifier board for adjusting volume level, crossover, phase and power switch. We recommend to do an initial setting first, then fine-tune to your preference value.

Initial setting suggestion:

- LEVEL: 12 o’ clock to 2 o’clock
- Crossover: 80-100 Hz
- Phase: 0 °
- Power: Auto

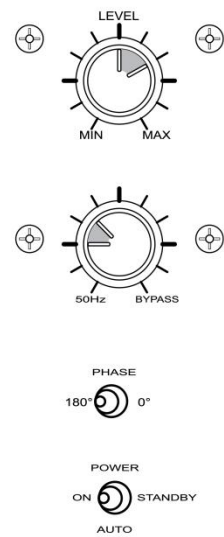

Receiver Set Up

Most modern receivers support “On Screen Setup”, you can easily setup your subwoofer by following the screen setup guidelines.

1. Enter into receiver’s setup menu and go to “Speaker Setup”. Set the subwoofer value to “LFE + Main” if your front speakers are “small”; if your front speakers are “large”, then set up the subwoofer value to “LFE”
2. When set up the “crossover”, it’s important to match the crossover point between the front speaker and subwoofer. (e.g. if your front speaker crossover is at 80Hz, your subwoofer should set at 90Hz for the best result)
3. In the speaker distance menu, you should measure the distance between your subwoofer and your mainly listening position, then input the distance value into the menu.
4. The last step is to set up the volume level. You can set the volume at subwoofer’s amplifier board at 12 o’clock or 2 o’clock place first, then fine-tune the “level calibration” knob at receiver for you preference SPL level.

SW-C600W Specification

Frequency Response	20Hz~150Hz
Max Power	400W
Woofers	12” Polypropylene Bass Cone
Type	Low-Frequency Reflex Subwoofer
Amplifier Type	Class D Amplifier
Dimensions (W*H*D)	14.1”*16.5”*14.9”(36cm*42cm*38cm)
Weight	35.2 lbs(16.0 Kg)

Design

SW-C600W is equipped with our state-of-the-art technologies; it is designed to deliver solid and deep bass to support any hi-fi or home theater systems. This Subwoofer utilizes a 400 watts Class D amplifier with high effectiveness of power supply, very low-level heat emission to guarantee the highly safety of the circuits. Unlike traditional subwoofers, this 12" unit offers advanced polypropylene bass cone, which is distinguished by its high rigidity and low mass driver, making the SW-C600W full of precision with very low distortion even at extreme listening levels.

SW-C600W adopts a front-firing design with a ported driver at the base to produce a very deep and explosive bass output. The High Density Fiberboard (HDF) enclosures successfully reduce cabinet vibrations and resonance to deliver the bass with a vanishingly low distortion.

Additionally, this SW-C600W supports wireless function with a TX-C600 transmitter. It can be connected with the audio source wirelessly to rescue you out from the intricate cable nets. The SW-C600W will undoubtedly add solid, deep, room-shaking bass to elaborate the experience of your listening and movie watching.

Features

- **Advanced 12" Front-Firing Polypropylene Bass Cones**
This bass driver features its rigidity to endure extreme-level driver movement and impacts, it can deliver a solid and deep bass with no distortion.
- **Wireless Connection with TX-C600 Transmitter**
SW-C600W is designed and built with the wireless function combined with our TX-C600 transmitter. Your subwoofer can boost a flexible placement and free of cable constraint.
- **400 Watts Class D Power Amplifier**
SW-C600W uses an efficient 400 watts class D amplifier with a high current switching power supply. This allows maximum performance output with very low heat emission.
- **Advanced Rubber and Butyl Suspension**
The rubber and butyl suspension ensures smooth response, deeper and louder bass performance and ideal linearity.
- **Anti-Resonant HDF Cabinet**
SW-C600W cabinet is made of solid High Density Fiberboard (HDF) to guarantee that the cabinet is perfectly free of any unwanted vibrations.



Warranty

We promise that all SensaSound speakers are elaborately designed and manufactured with the strictest quality requirements. Under normal use we warranty them free from defects in materials and workmanship for a certain warranty period from the original purchase date.

- The warranty for SW-C600W amplifier is valid for 1 year.
- The warranty for other parts of SW-C600W is valid for 3 years.

If any defects in materials and workmanship occur within the limited warranty period, you can get immediate help from the following ways:

Contact the dealer from whom you purchased the products

Or you can send an email to **service@sensasound.com**

However, after the warranty period, you will be responsible for the charges incurred from spare parts, labor service and shipments, etc.

No matter which way you choose to obtain the service, we need the information of model, serial number, original purchase date and detailed problem description from you. Once we have confirmed that any parts need to be repaired or replaced, it is required that you carry or send your products to the SensaSound dealer where you bought them. Please note, that we also need your warranty card and purchase proof, so keep them in a secured place after your purchase of SensaSound products.

Important:

Please do not entrust any repair work to unauthorized person or party. Only the authorized SensaSound dealers and distributors can provide the original components necessary for servicing the products. We do not warranty any service to any modified parts that are not from authorized ways.

Warranty does not include (but are not necessarily limited to) :

- Those caused by force majeure and acts of nature.
- Damages caused by any use other than correct use described in the user manual.
- Damage caused by improper installation, adjustment or was installed in seal up environment.
- Damage caused by shipment other than arranged by SensaSound.
- Bought, repaired, modified or use of parts that are not made or authorized by SensaSound.
- If the serial number has been altered, defaced or removed.
- For deterioration of component parts, the nature of which is to become worn or depleted with use.

Shipping charge:

If the repairs are covered by the warranty, you need to pay for the charge incurred by sending the product to the maintenance point, and SensaSound will pay the return shipping charge. We provide all support and guidance to make sure the process moves smoothly.